


Sundance Spas 680 Prado 5™

Specifications

<p>Dimensions84" x 76" x 34.5" (213 cm x 193 cm x 87 cm);</p> <p>Seating Capacity.....4-5 Adults</p> <p>Dry Weight.....559 lbs (254 kg)</p> <p>Filled Weight (Spa Volume)4,216 lbs (1,912 kg)</p> <p>Filled Weight (Average Fill).....3,515 lbs (1,594 kg)</p> <p>Water Capacity (Spa Volume)438 US gallons (1,658 Liters)</p> <p>Water Capacity (Average Fill)354 US gallons (1,340 Liters)</p> <p>Electronic ControlsSolid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles</p> <p>Pump 1.....North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous</p> <p>Total Hydrojets:23</p> <p>Seat A Jets:.....3 DXL</p> <p>Seat B Jet:.....6 DXL</p> <p>Seat C Jets:.....4 DX, 2 DVX</p> <p>Seat D Jet:.....4 DVX</p> <p>Foot Well Jets (E):4 DL</p> <p>Air Controls/Massage Selectors: ...None; No Massage Selector</p> <p>Filter:50 ft² Filter Cartridge System</p> <p>Water Treatment:.....None</p> <p>Lighting:2 LED bullet lights (underwater)</p> <p>Synthetic Cabinet:Available in Coastal and Mahogany</p> <p>Shell Colors:North America: Platinum and Celestite (Gypsum) Export (50 Hz): Platinum and Celestite (Gypsum)</p> <p>Headrest:.....None</p> <p>Heater:.....North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW</p> <p>Electrical Requirements:.....North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x20A or 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.</p> <p>Limited Warranty*:.....North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</p> <p>Waterfall Feature:None</p> <p>Audio System (Optional):None</p>	
---	---

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado 5

Operation/Seat Depths



- Jets Pump 1: Powers All Jets + Waterfall when running
- Air is on, all of the time, when Jets pump 1 is running.

23 Total Jets



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.50" (64.7 cm)**
- B = 27.50" (69.9 cm)**
- C = 27.50" (69.9 cm)**
- D = 27.40" (69.6 cm)**
- E = 30.25" (76.8 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice


Sundance Spas 680 Prado 5

Portable Dimensions


TOP VIEW

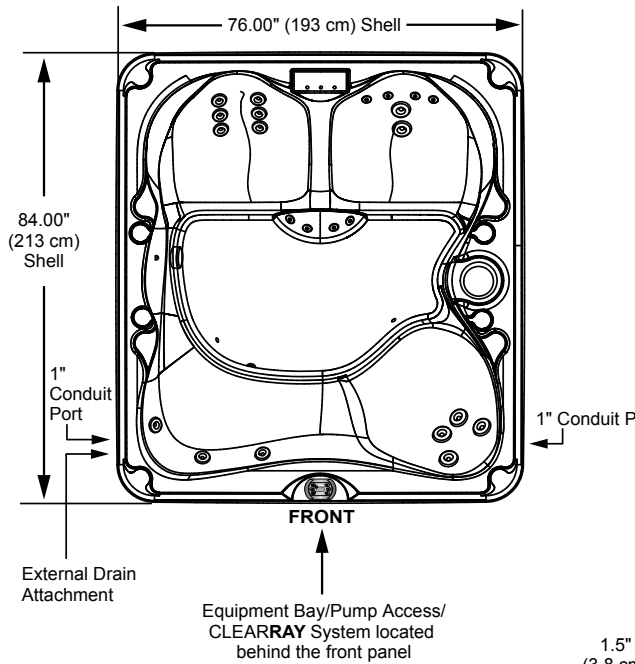


FRONT VIEW
(Front view with stereo option shown)

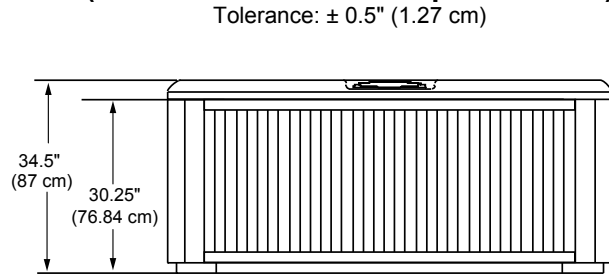

LEFT SIDE VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

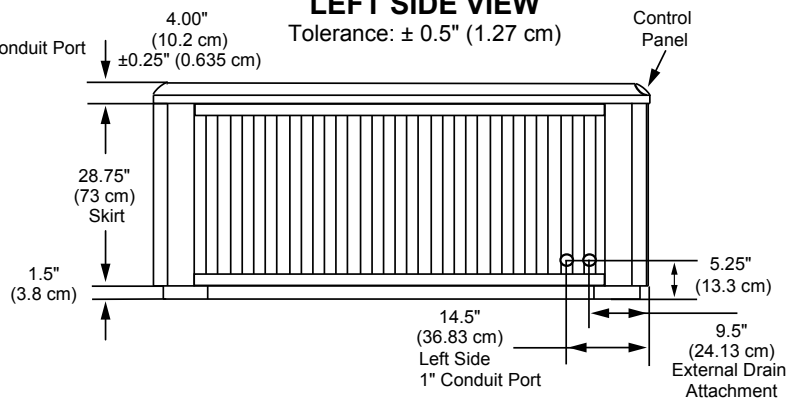

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

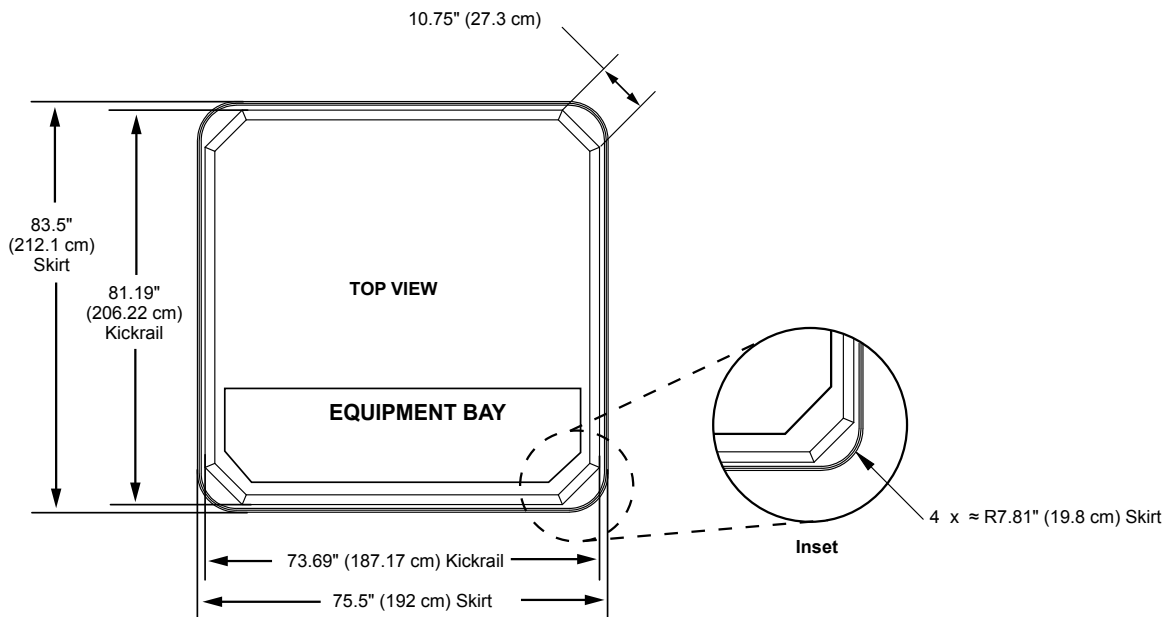

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Denne modellen kan kobles med 1-fas 230V C-sikring

680-serien:

5-Prado	For å få mest mulig glede av badet anbefaler vi høyeste kurs for optimal drift.			
	Type varmeelement	Alternativ tilkobling	Funksjon	Kretskortinnstillinger
5-Prado	5,5 kW	32 amp eller 10 + 25 amp	Varmeelement og pumper kan brukes samtidig	Se brukermanual.
5-Prado	2,7 kW	20 amp eller 13 + 10 amp	Varmeelement og pumper kan brukes samtidig	Se brukermanual.
5-Prado	2,7 kW	16 amp	Varmeelementet slår seg av når pumpene settes på høy hastighet.	Se brukermanual.