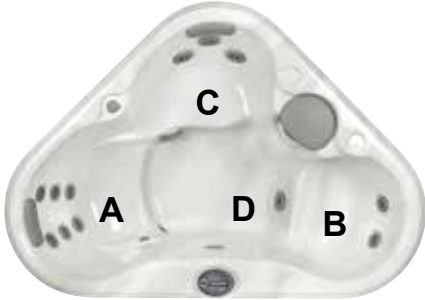


Sundance Spas 680 Tacoma®

Specifications

| | | | |
|---|---|---|--|
| Dimensions: | 68" x 68" x 31" (173 cm x 173 cm x 79 cm) |  | |
| Seating Capacity: | 2 Adults | | |
| Dry Weight: | 424 lbs (192 kg) | | |
| Filled Weight (Spa Volume): | 2,009 lbs (911 kg) | | |
| Filled Weight (Average Fill): | 1,633 lbs (741 kg) | | |
| Water Capacity (Spa Volume): | 190 US Gal (719 Liters) | | |
| Water Capacity (Average Fill): | 145 US Gal (549 Liters) | | |
| Controls: | Series Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration and Heat Cycles | | |
| Water Delivery: | 1 High Flow Pump | | |
| Pump 1: | North America (60 Hz): 1.5 HP/2-Speed Continuous, 11.3A max. Export (50 Hz): 2-HP/2-Speed Continuous, 8.0A max. | | |
| Total Hydrojets: | 12 | | |
| Seat A Jets: | 6 DXL | | Textured Jets are standard. Stainless Steel is an option. |
| Seat B Jets: | 3 DVX | | |
| Seat C Jets: | 2 DXL | | |
| Foot Well Jet (D): | 1 DVX | | |
| Air Controls/Massage Selectors: ... | 1 Air Control; No Massage Selector | | |
| Filter: | 35 ft ² Filter Cartridge System | | |
| Water Treatment: | Factory installed CLEARRAY® Water Purification System | | |
| Lighting: | SunGlow Multi-Color LED Light | | |
| Synthetic Cabinet: | Available in Coastal, Mahogany, Autumn Walnut | | |
| Shell Colors: | North America: Platinum, Celestite (Gypsum), Sahara, Oyster (Opal), Copper Sand, Monaco, Midnight, Caribbean Surf, Sandstone, Porcelain Export (50 Hz): All North America colors | | |
| Headrest: | Two, 1-Piece Gray | | |
| Heater: | North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW | | |
| Electrical Requirements: | North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x20A or 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration. | | |
| Limited Warranty*: | North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets | | |
| Audio System (Optional): | Audio System Not Offered on This Model | | |
| Special Features (Optional): | Factory Installed SmartTub™ module | | |

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Tacoma

Operation/Seat Depths



A Air Control - Supplies Air to All Jets

12 Total Jets (textured jets)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.00" (63.50 cm)**
- B = 21.00" (53.34 cm)**
- C = 18.75" (47.63 cm)**
- D = 28.75" (73.03 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Tacoma

Portable Dimensions

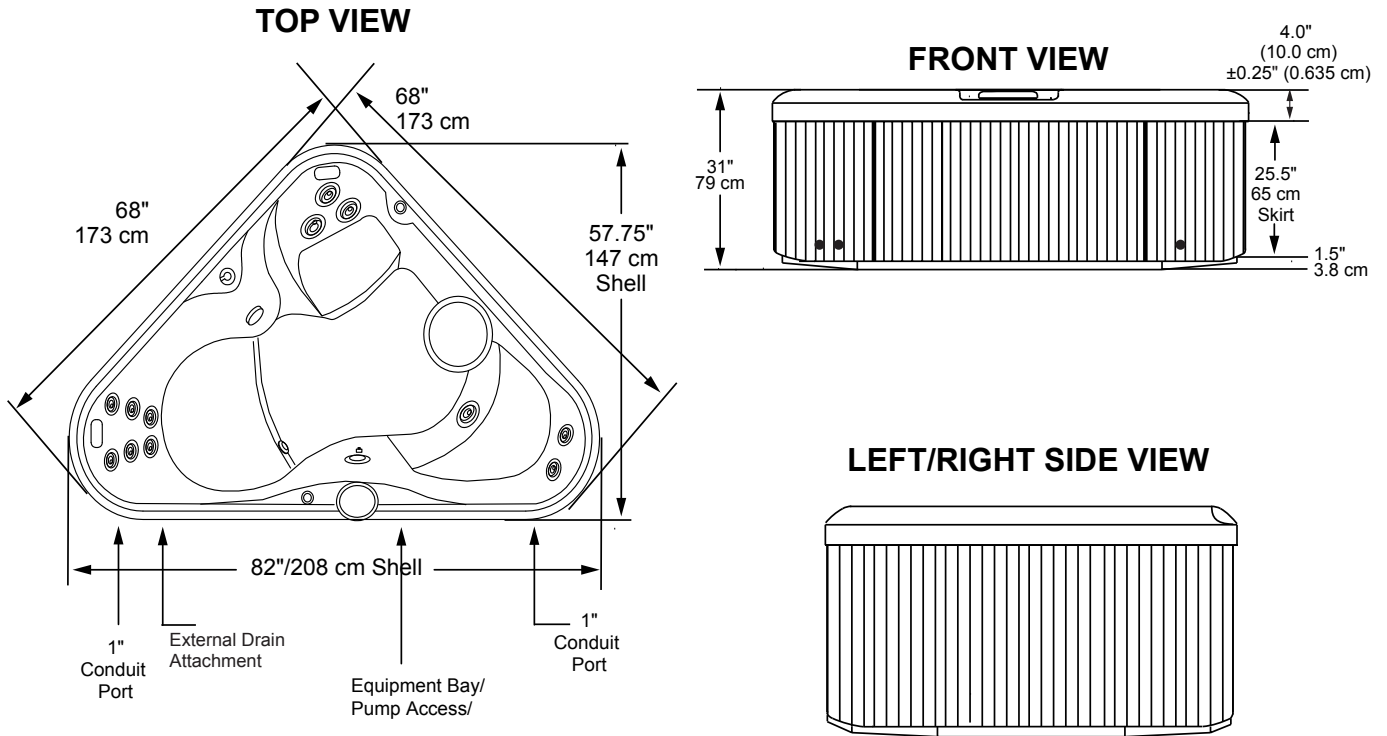

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

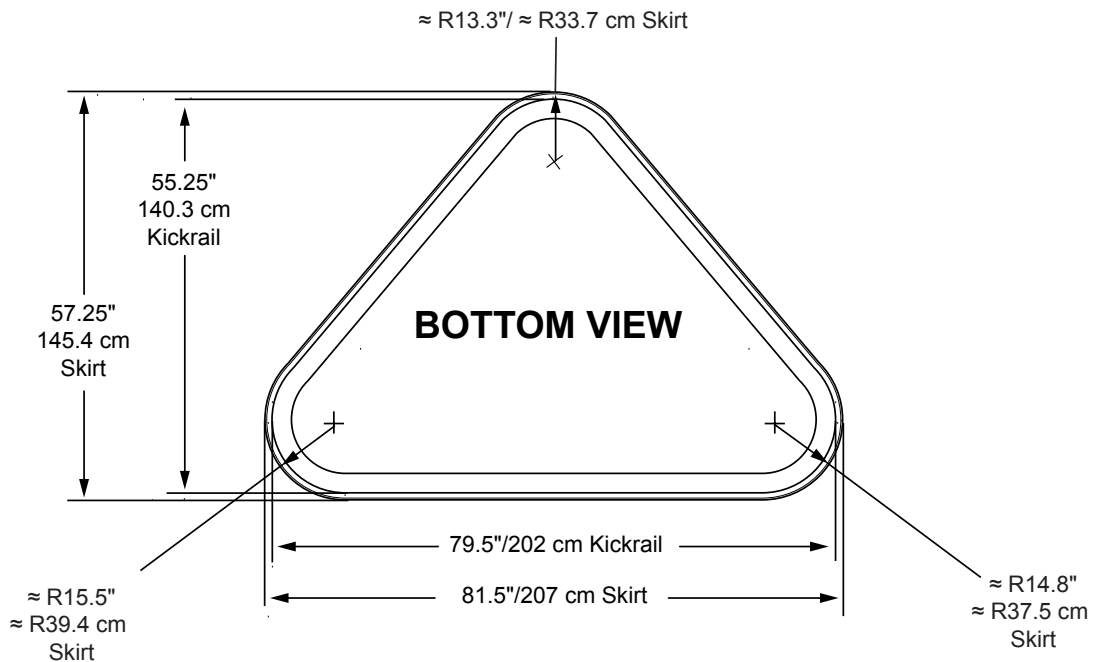

Dimensions/Specifications Subject To Change Without Notice

Denne modellen kan kobles med 1-fas 230V C-sikring

680-serien:

| | | | | |
|----------------|---|------------------------------|---|-------------------------------|
| Tacoma: | For å få mest mulig glede av badet anbefaler vi høyeste kurs for optimal drift. | | | |
| | Type varmeelement | Alternativ tilkobling | Funksjon | Kretskortinnstillinger |
| Tacoma | 5,5 kW | 32 amp eller 10 + 25 amp | Varmeelement og pumper kan brukes samtidig | Se brukermanual. |
| Tacoma | 2,7 kW | 20 amp eller 13 + 10 amp | Varmeelement og pumper kan brukes samtidig | Se brukermanual. |
| Tacoma | 2,7 kW | 16 amp | Varmeelementet slår seg av når pumpene settes på høy hastighet. | Se brukermanual. |